


FIG. 1

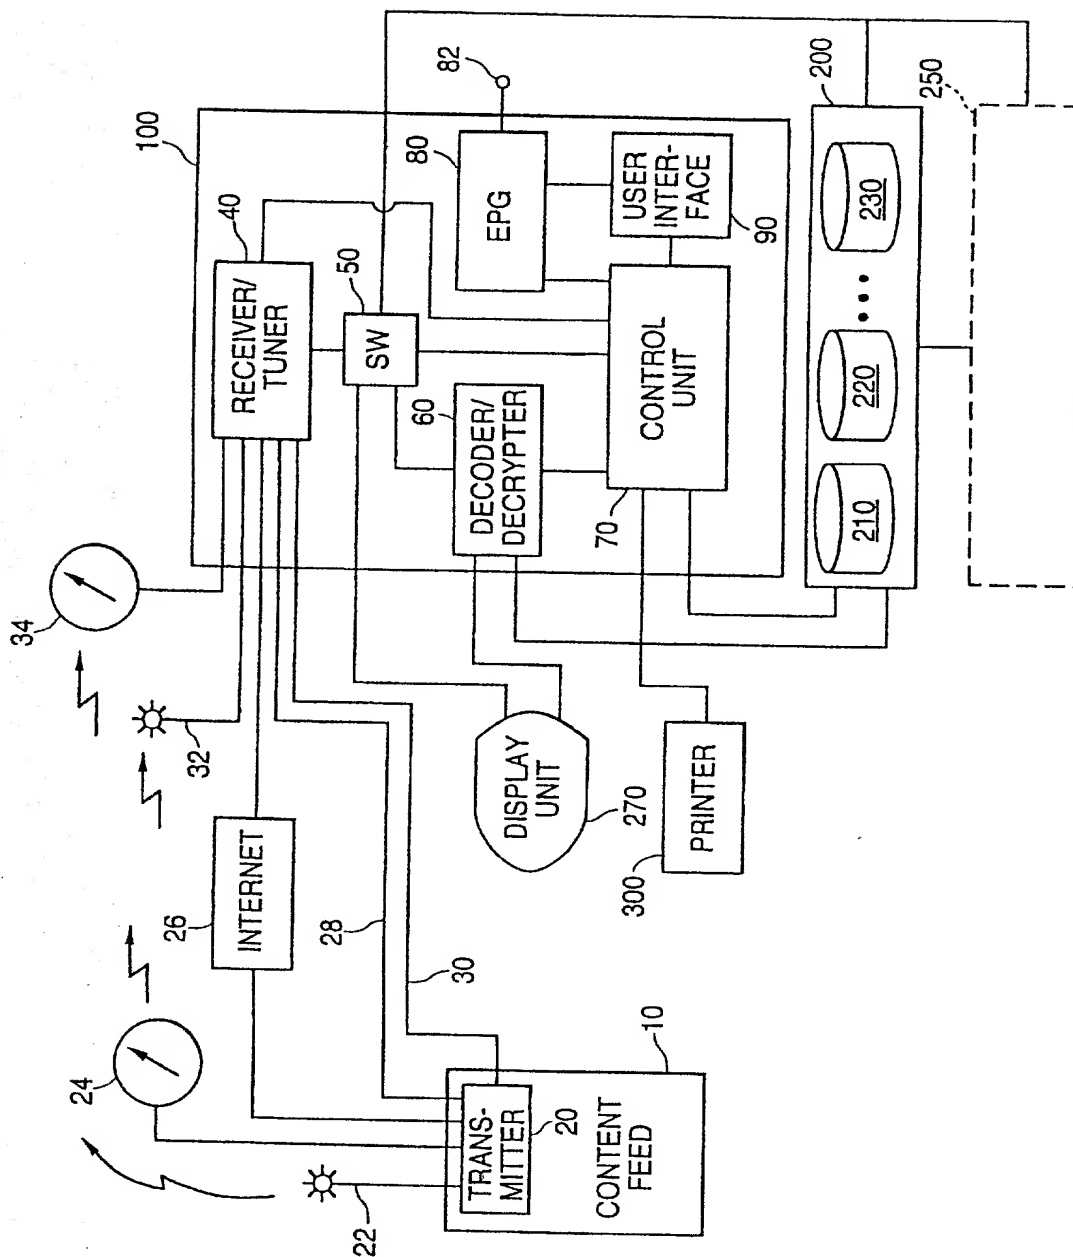

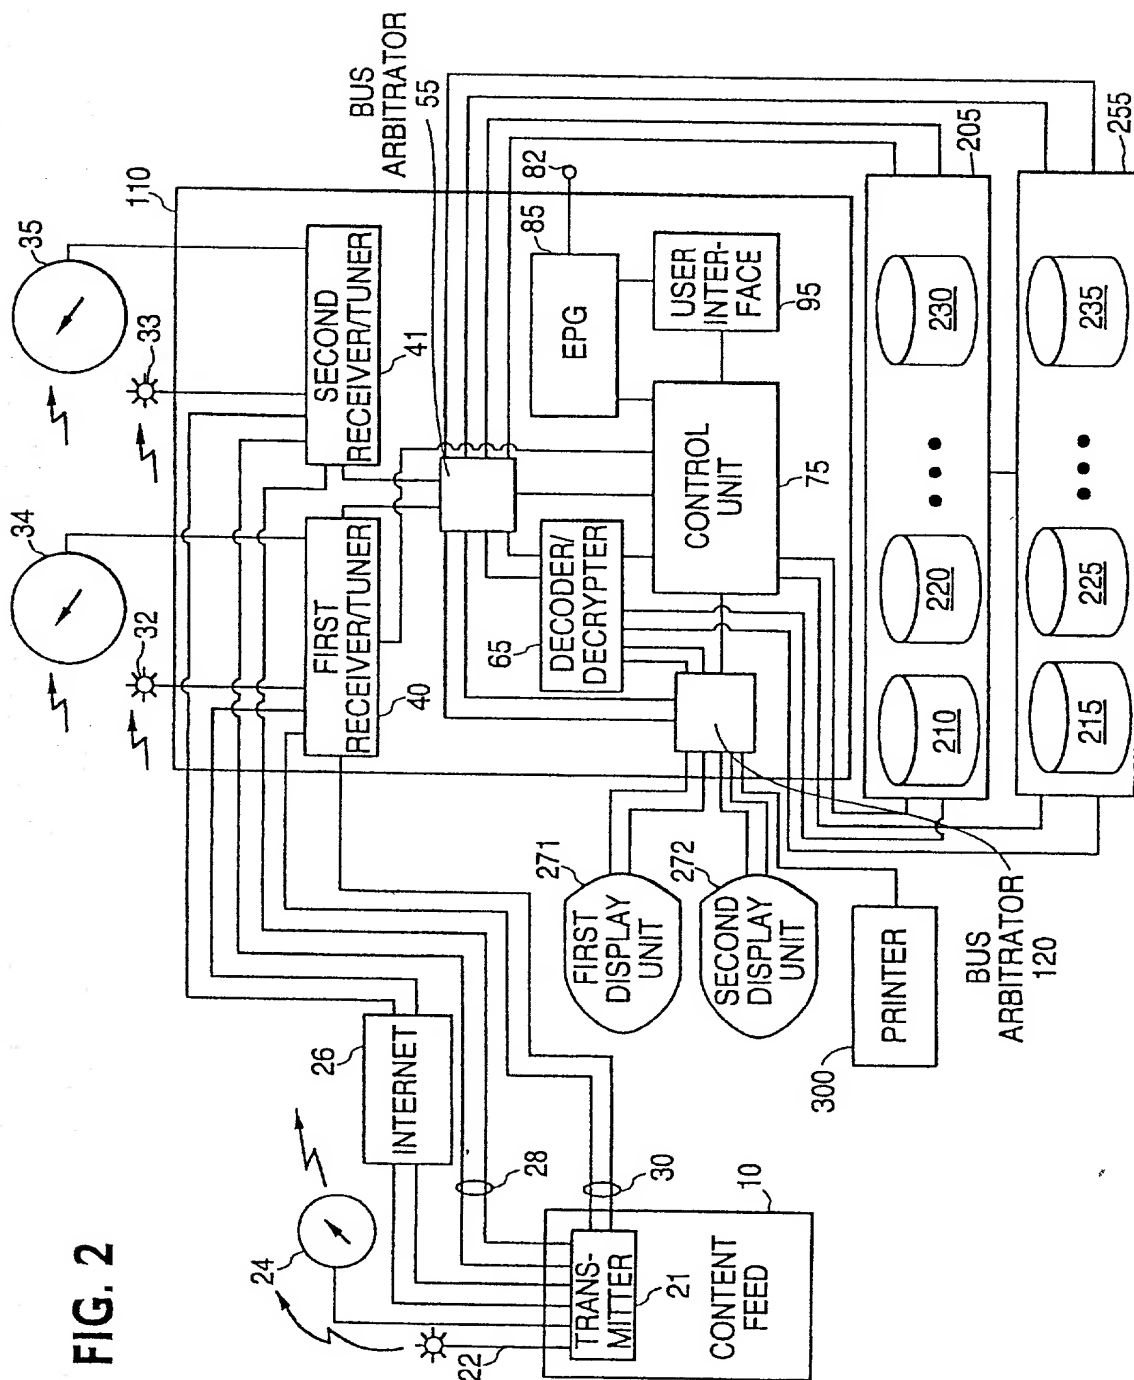
[illegible]

FIG. 3

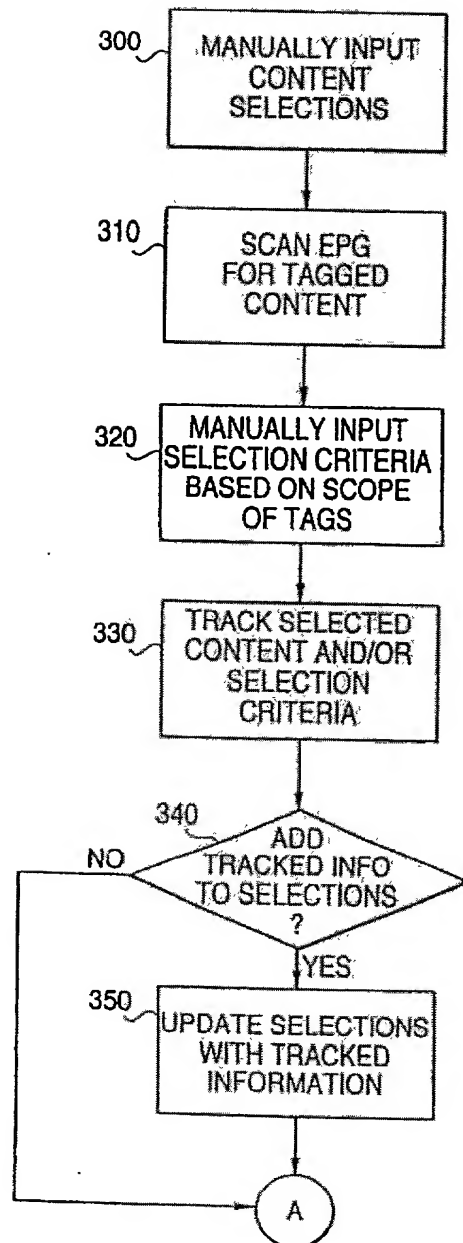


FIG. 4

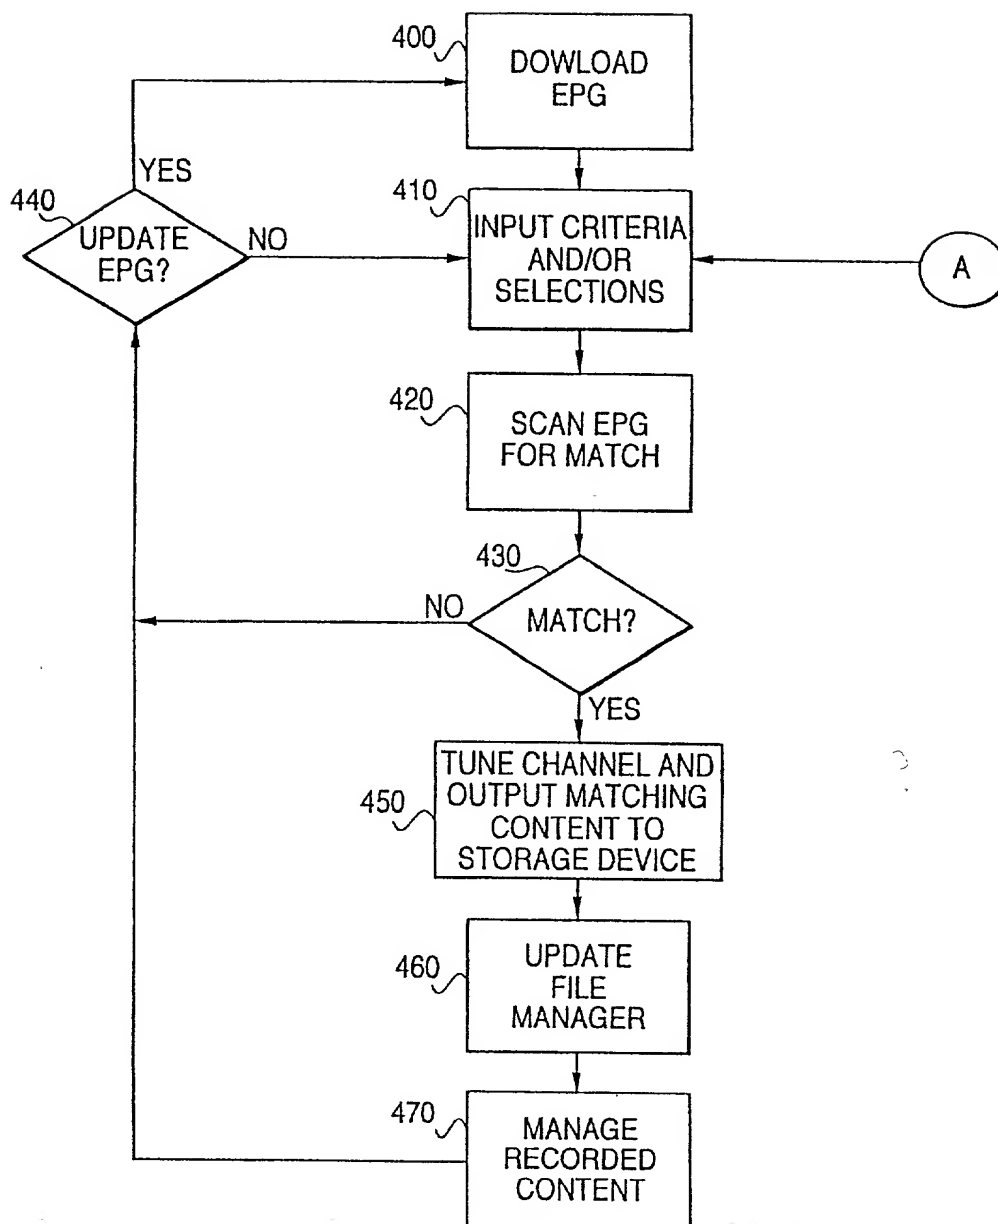


FIG. 5

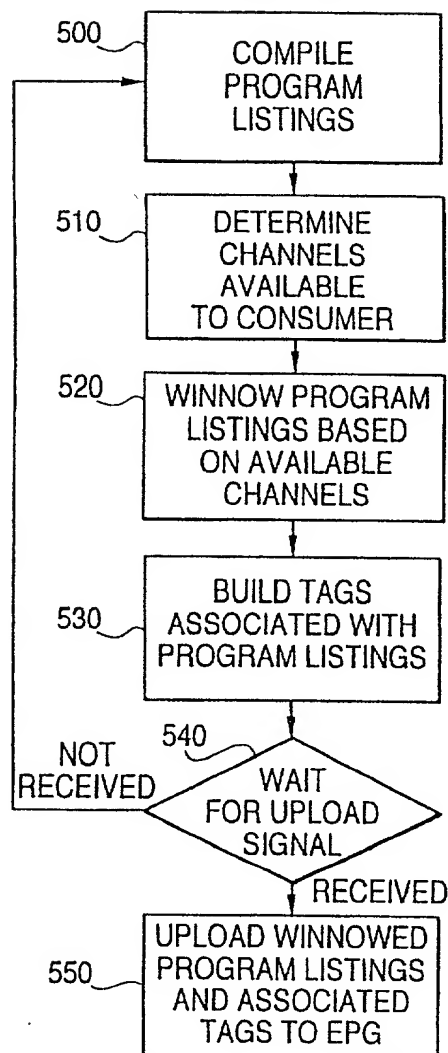


Figure 6

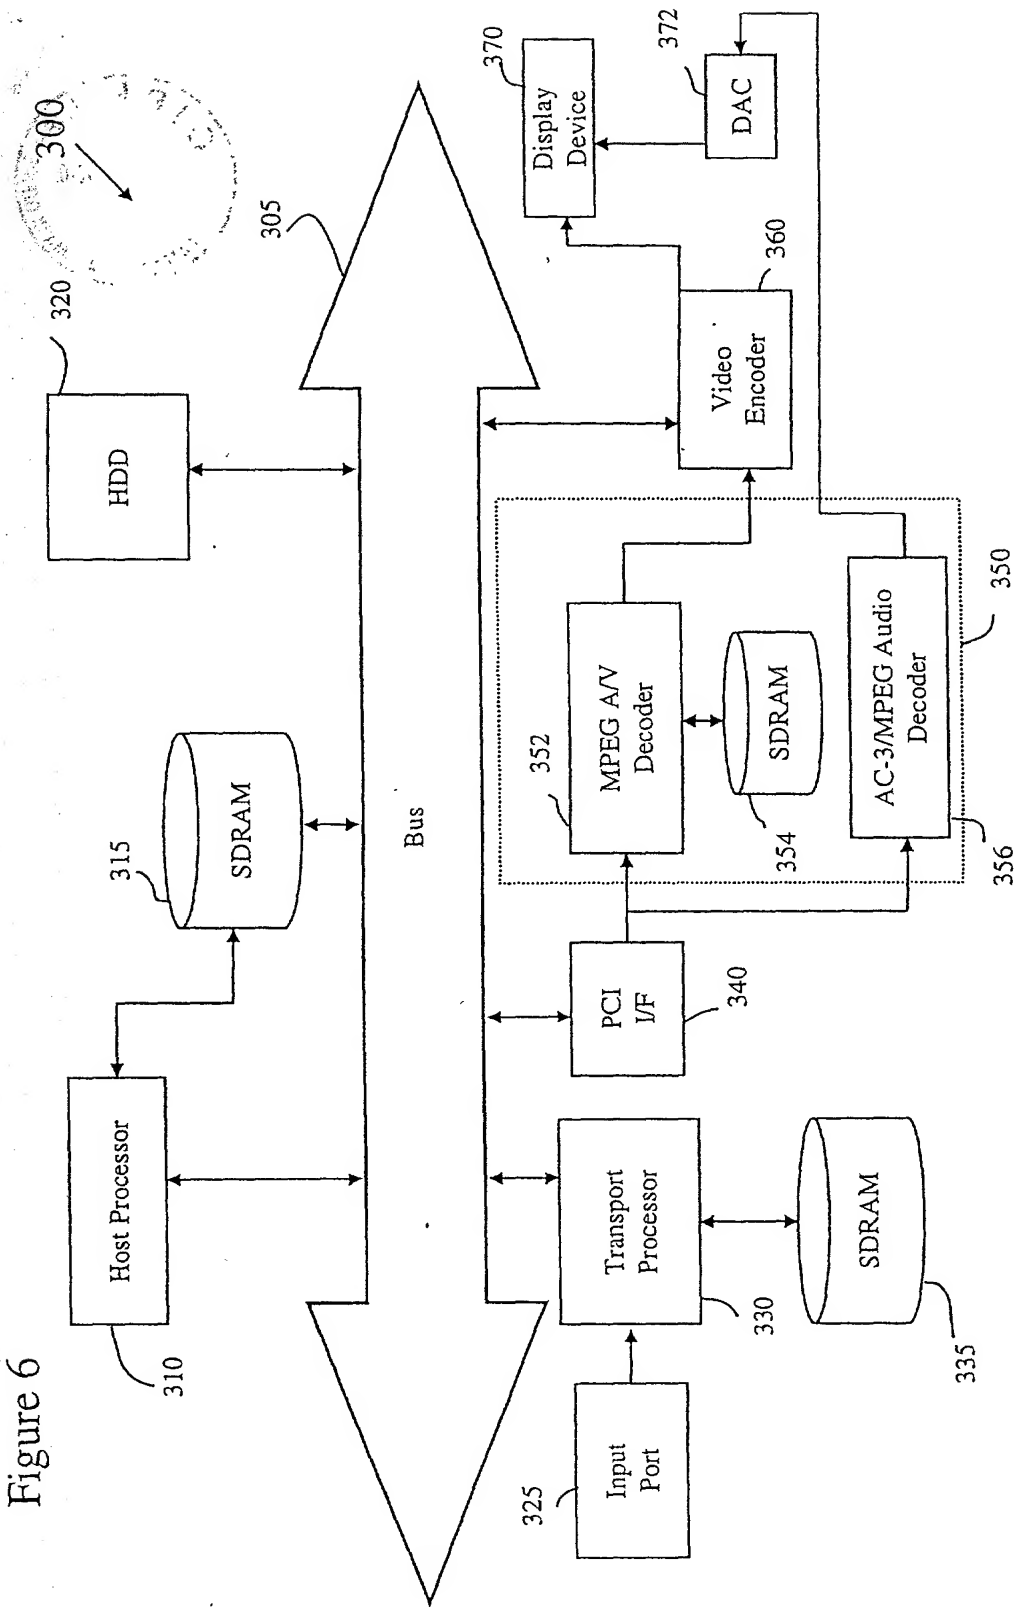


Figure 7

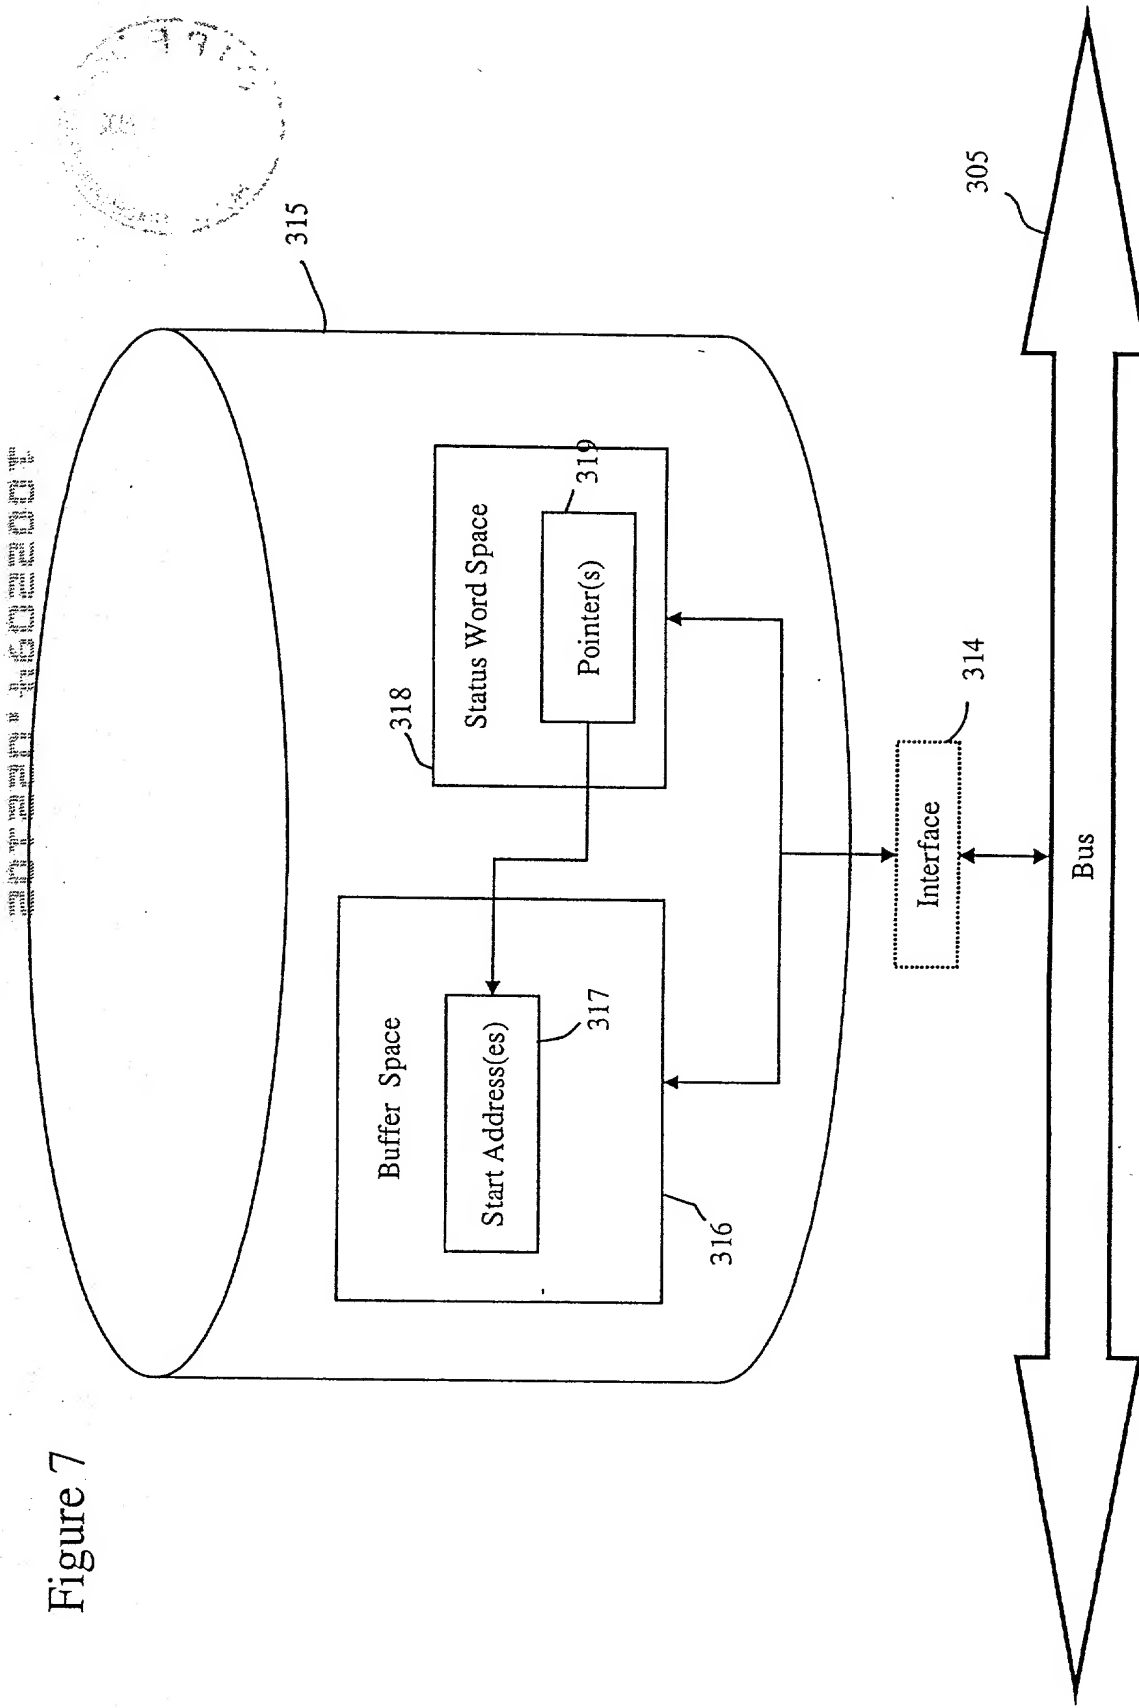


Figure 8

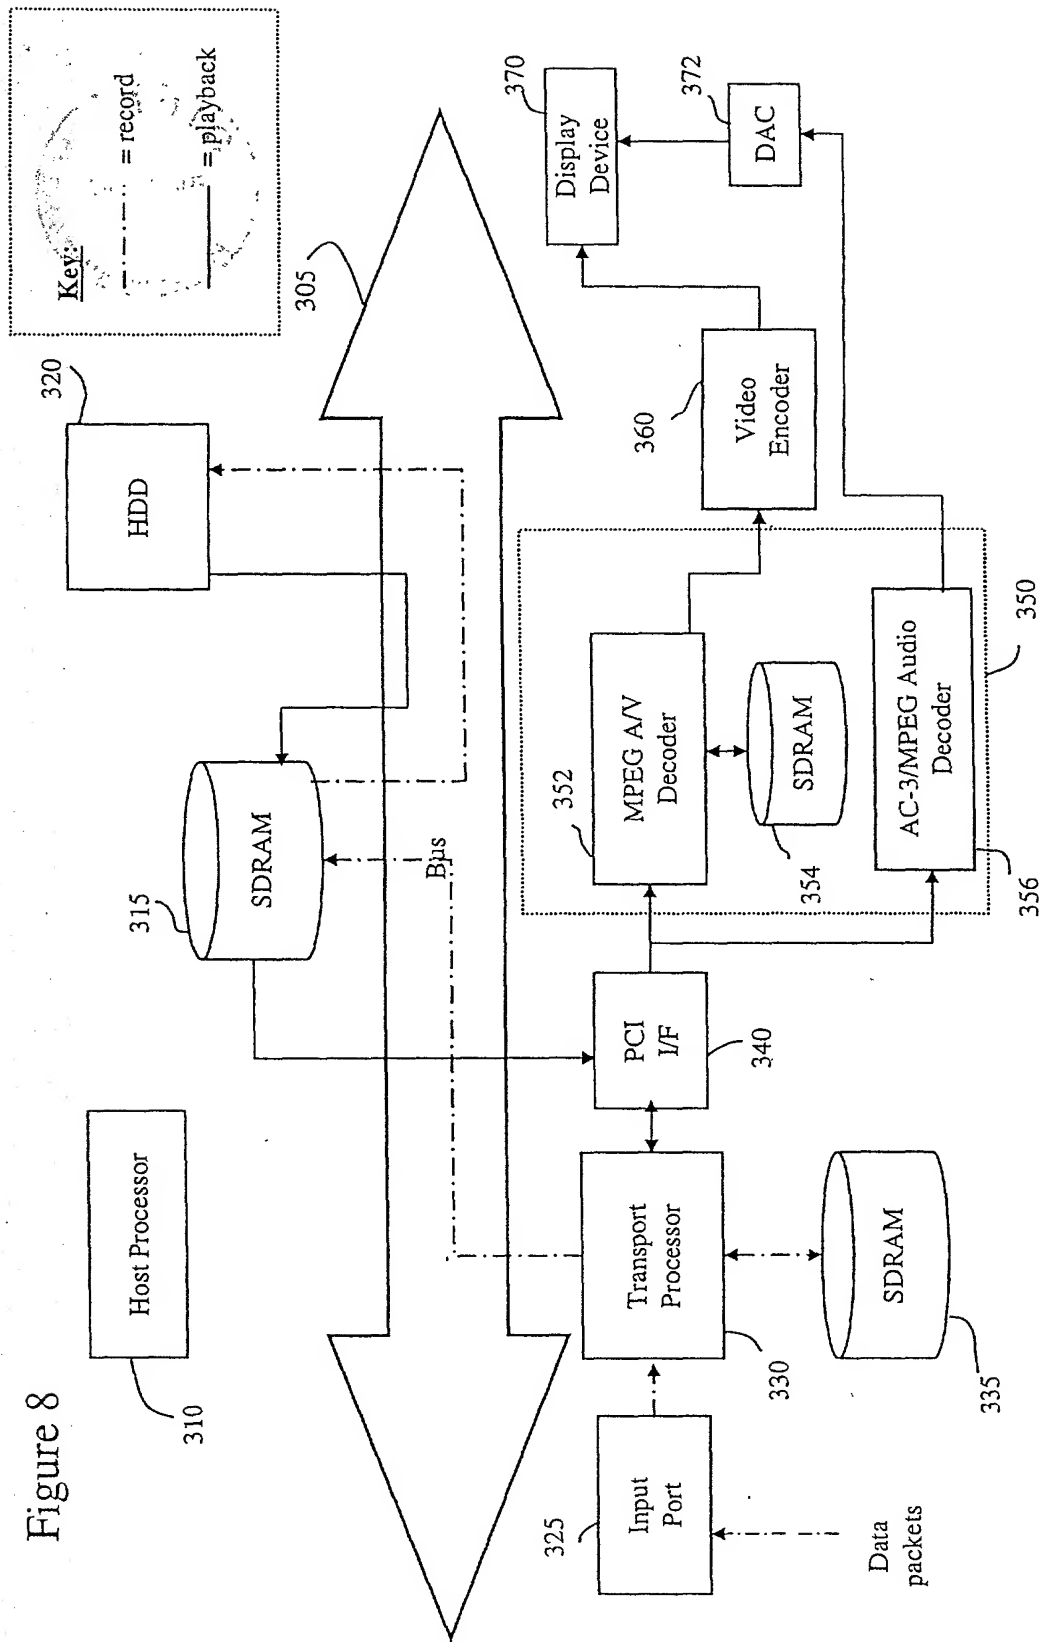




Figure 9

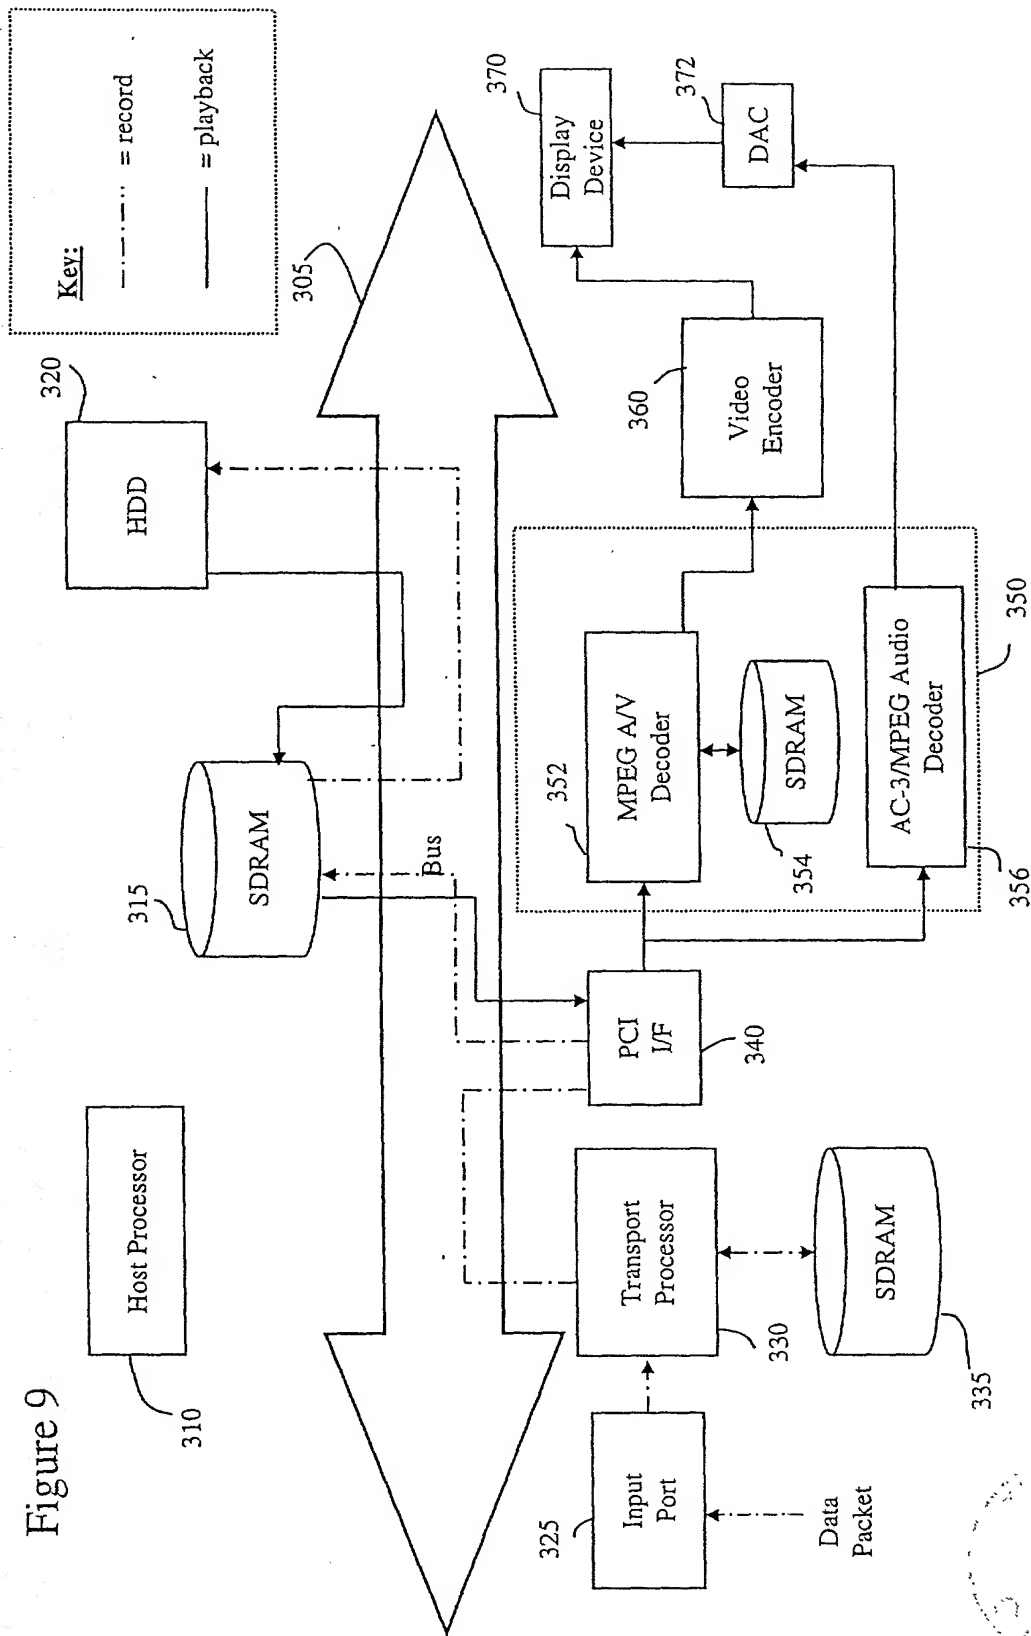


Figure 10

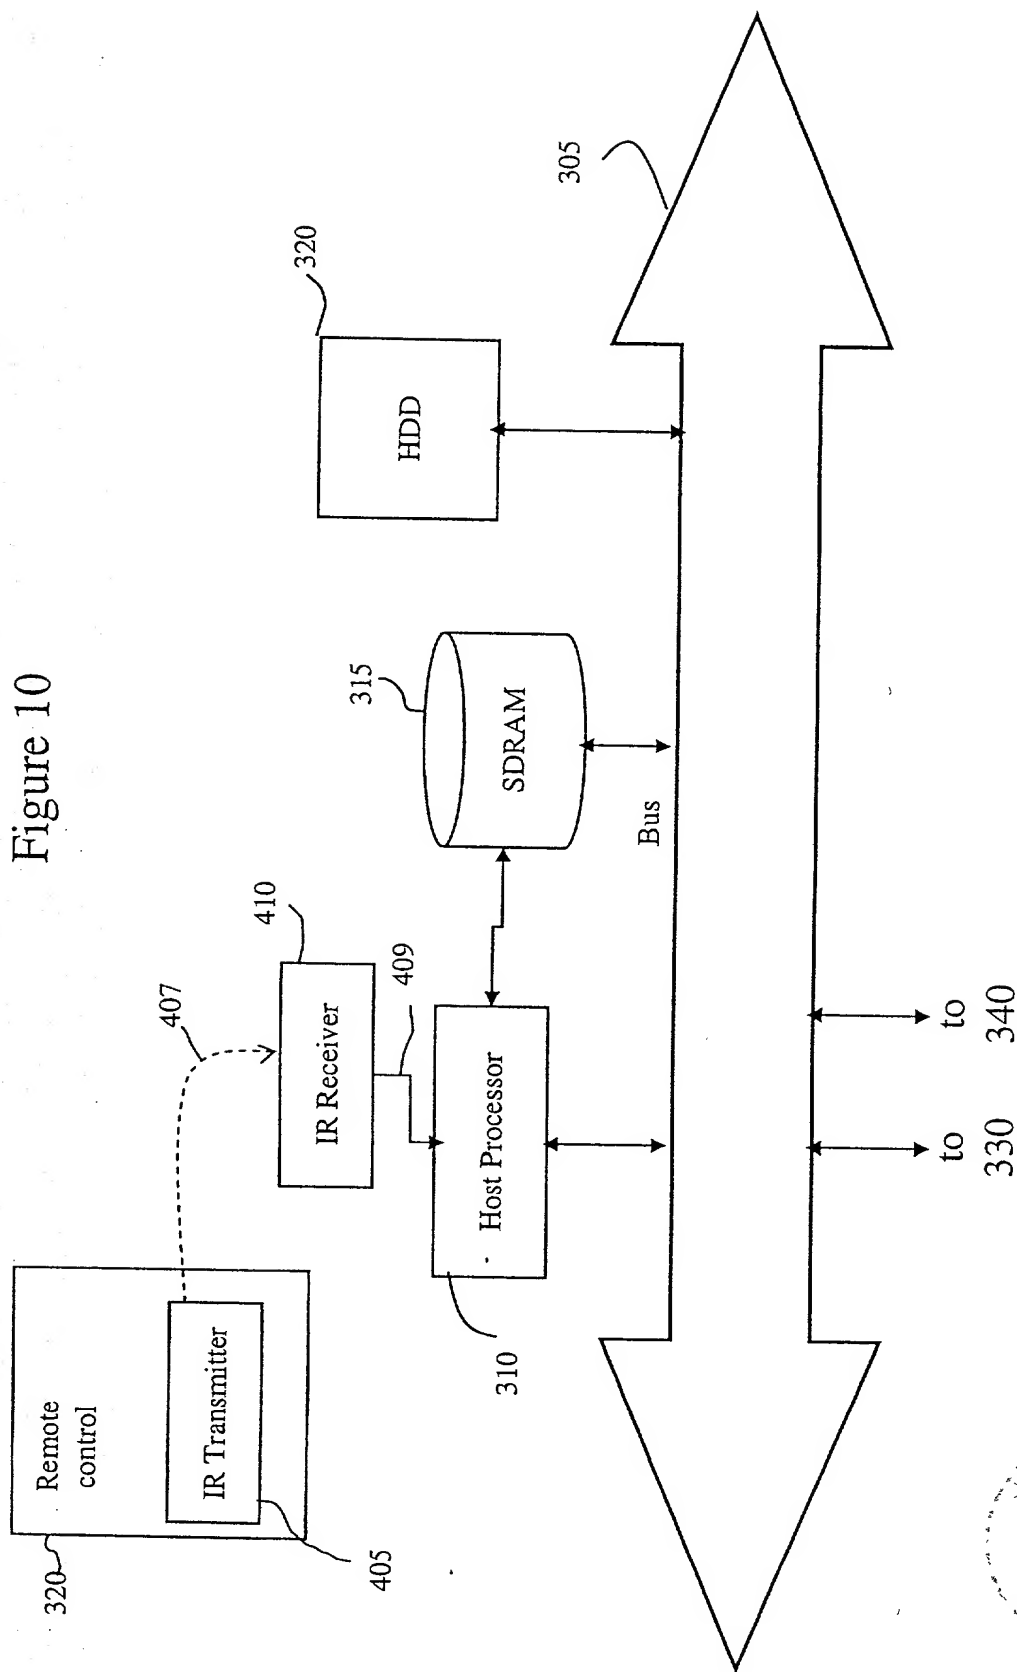


Figure 11

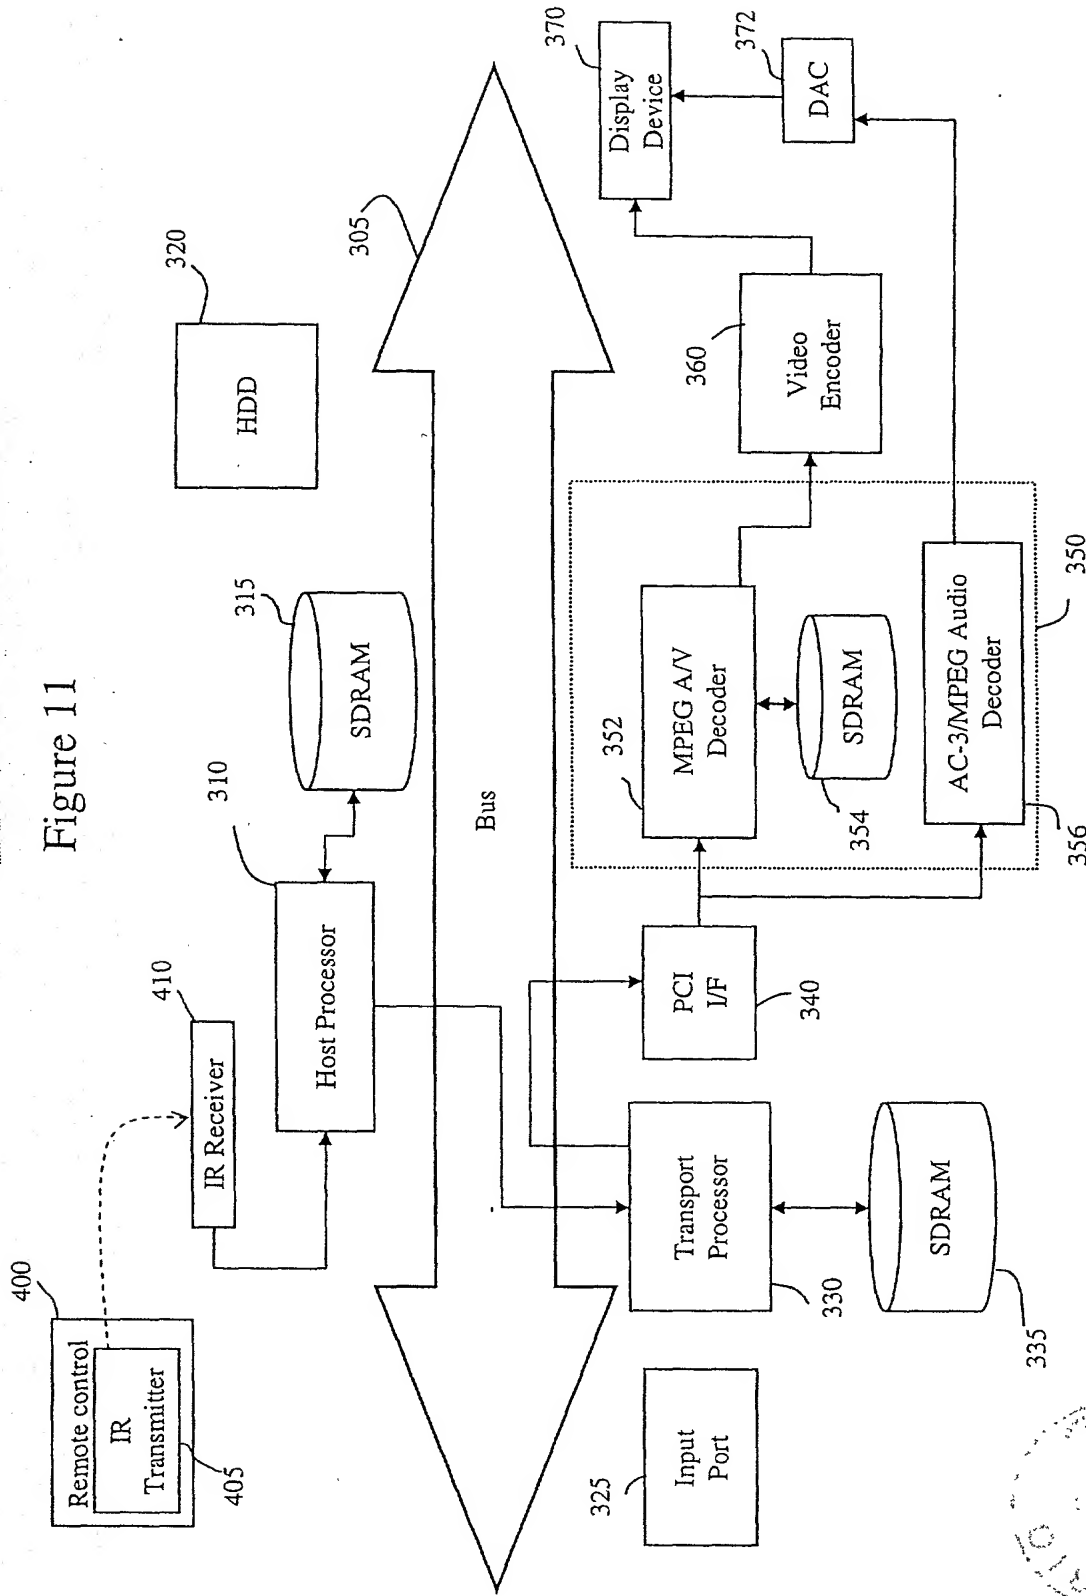


FIG. 12(a)

Figure 12(a)


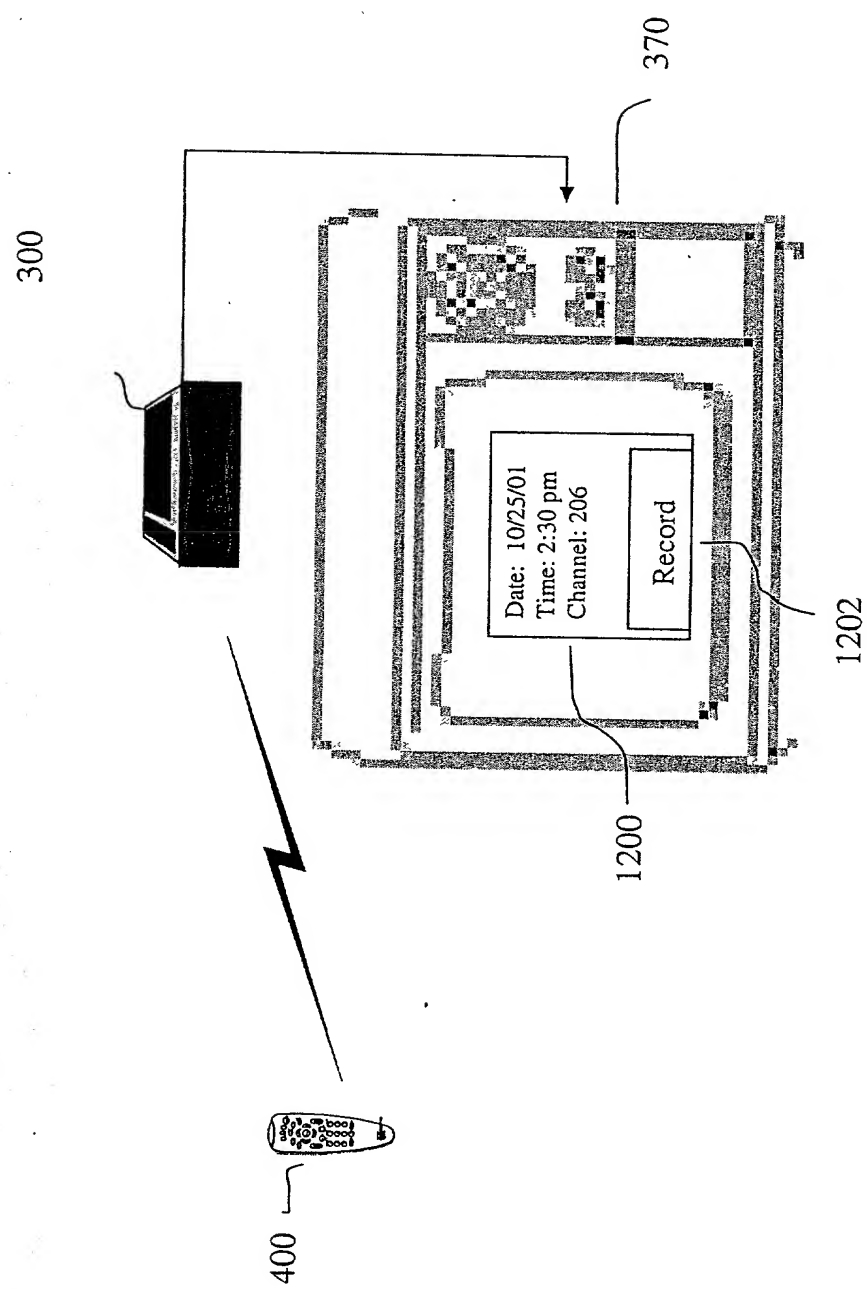


Figure 12(b)

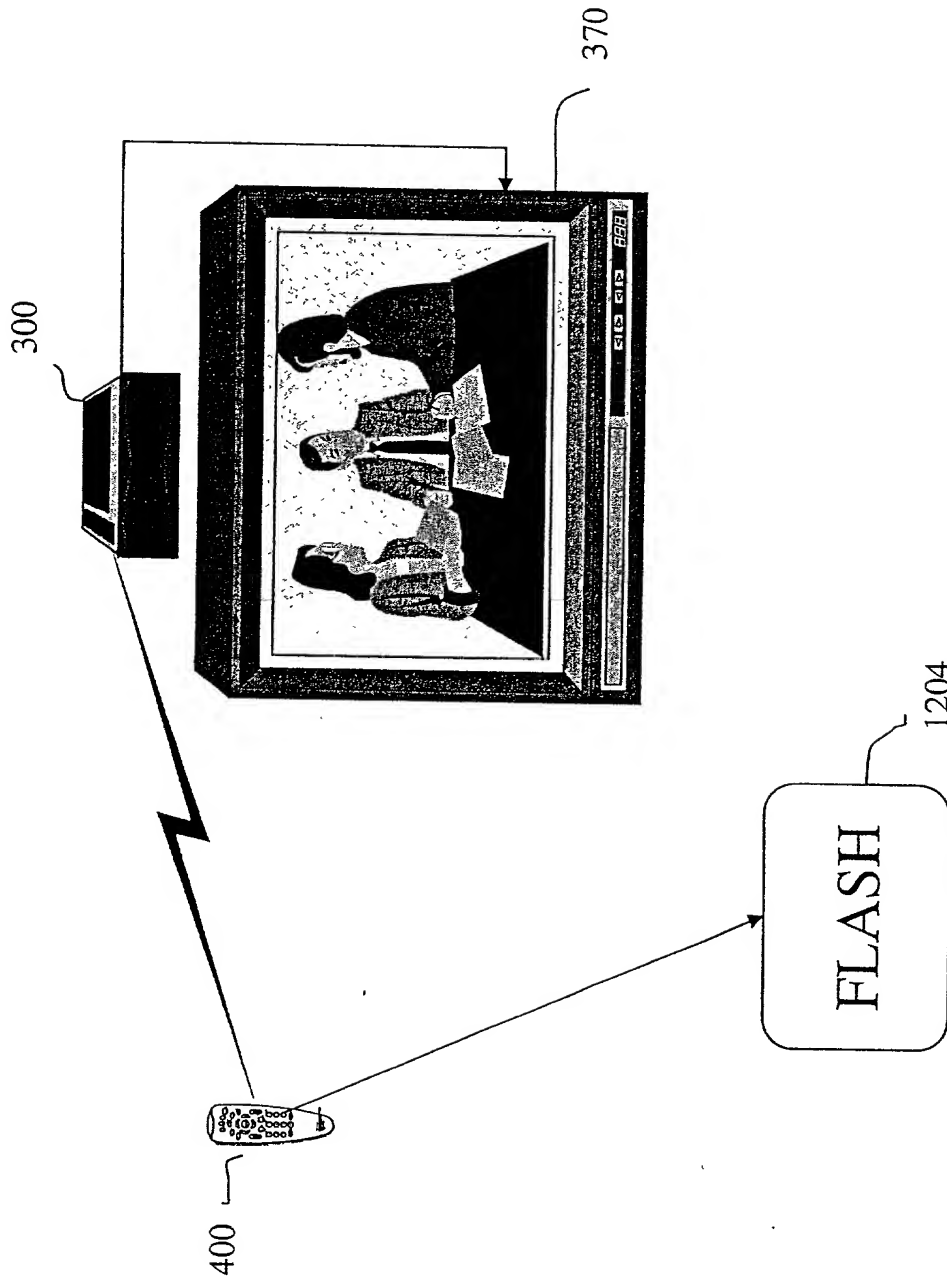


Figure 13

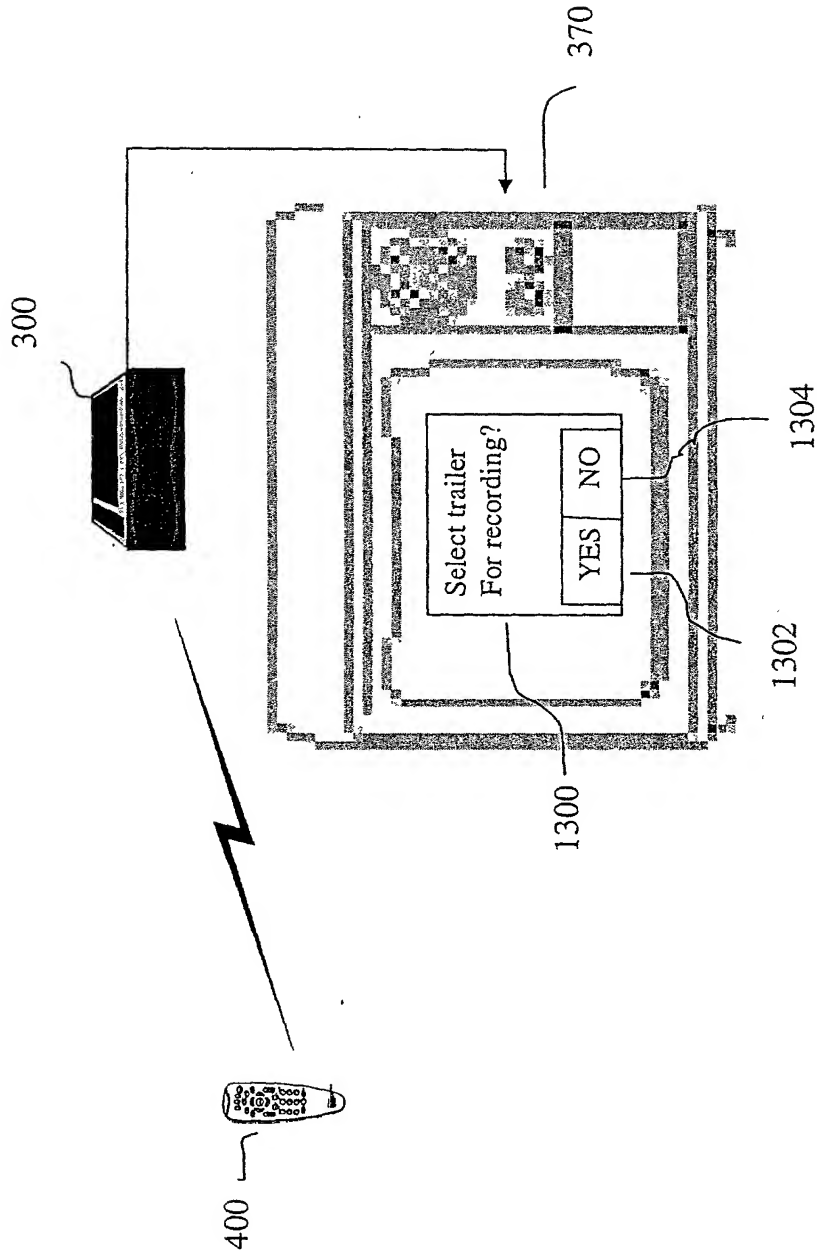


Figure 14

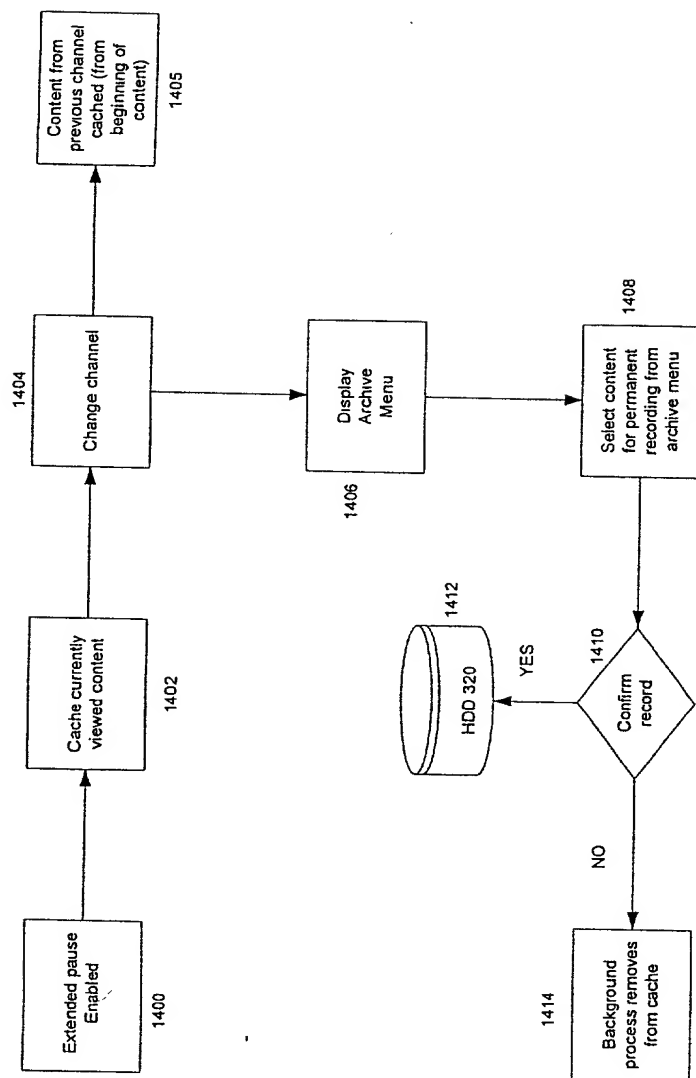


Figure 15

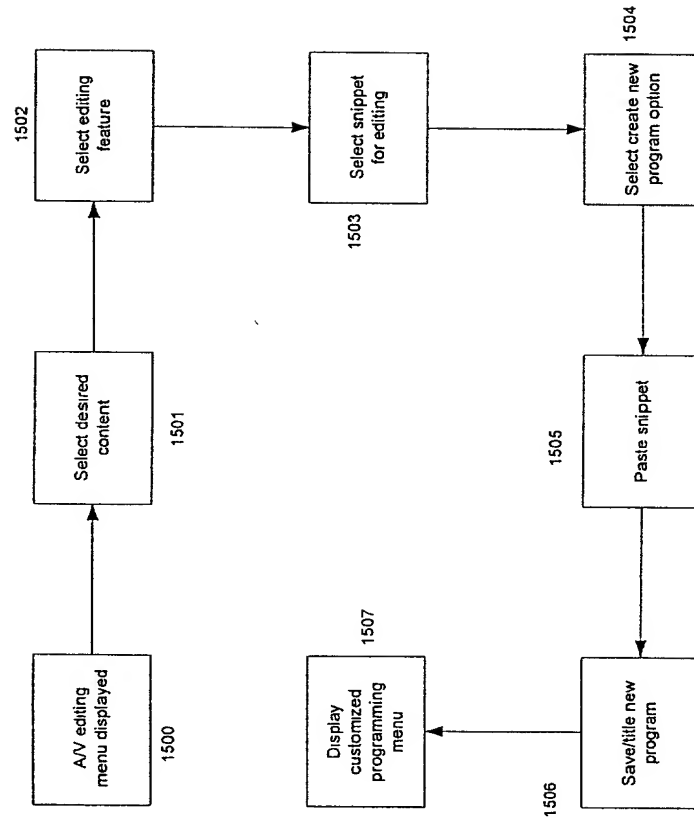




FIG. 16 is a schematic diagram of a Smart Convert interface. The interface displays a list of channels and programs, along with a date and time. The channels and programs are listed in a table. The date and time are displayed above the table. The interface is labeled 1600.

Figure 16

1600

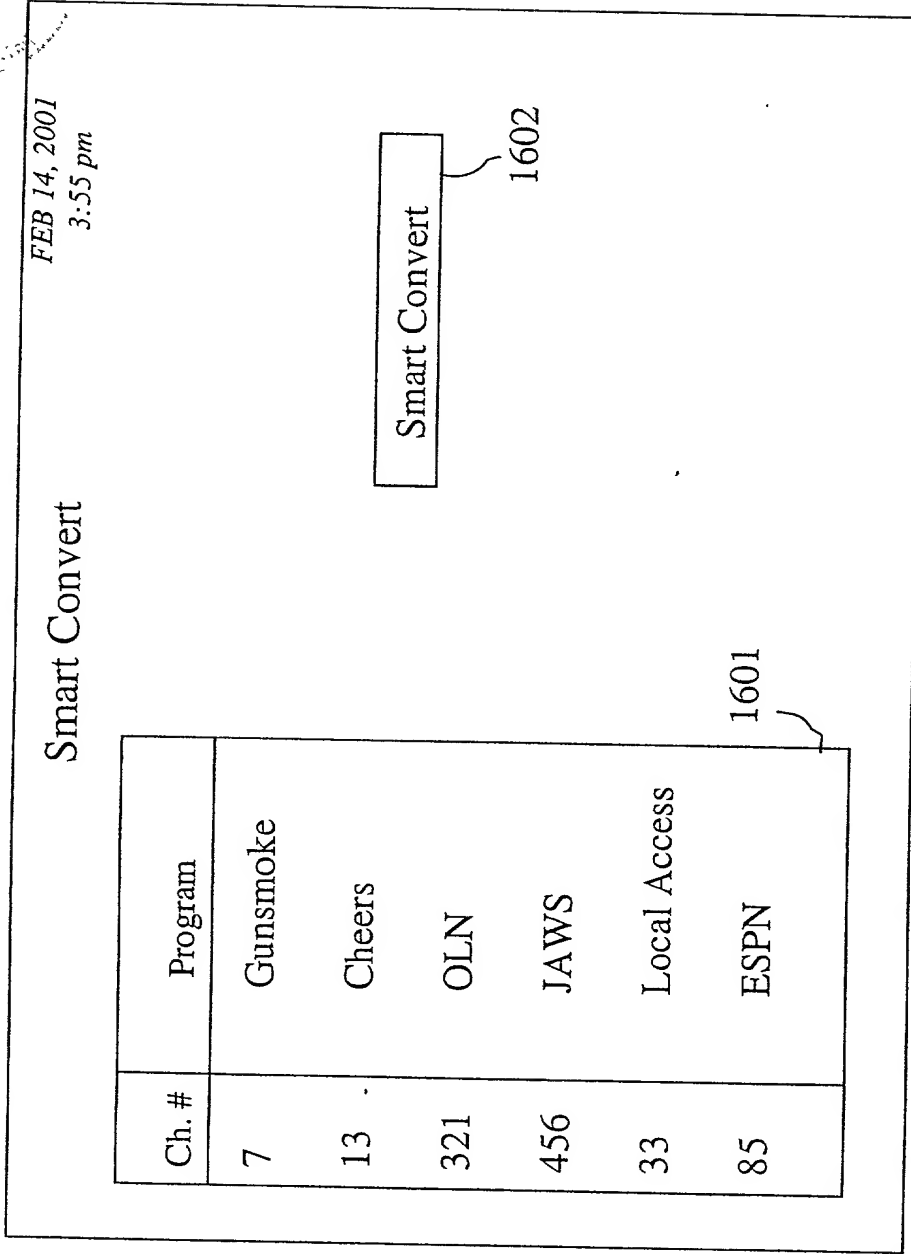


FIG. 17

Figure 17

1700

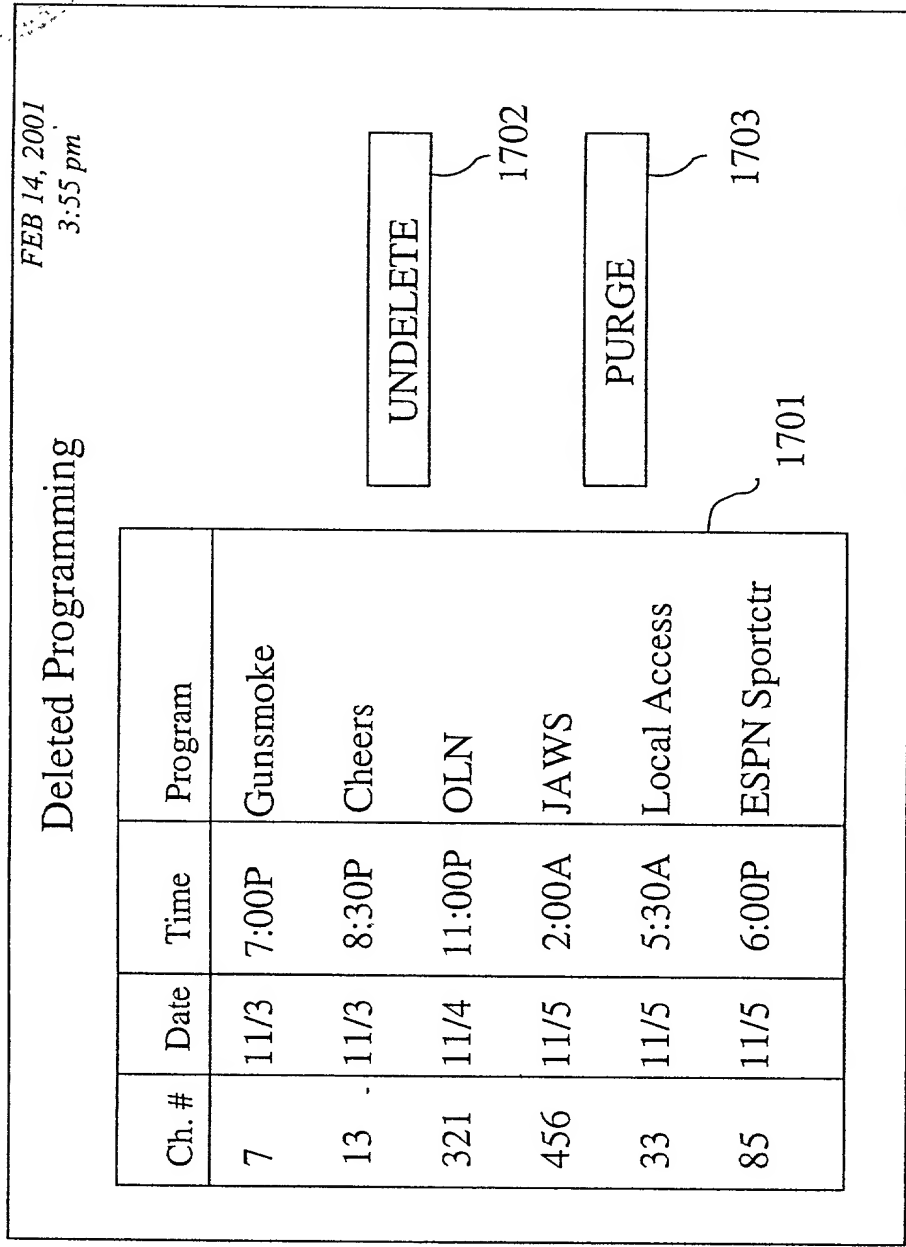


Figure 18

